



## 850nm Polarization Independent Isolator

## Features

- Low insertion loss
- High return loss and Isolation
- Excellent environmental stability

## Application


- Fiber laser&Optical fiber amplifier
- Optical instrument&Laser communication
- Test instrument&Optical fiber sensing

## Specifications

| Index Parameter                 | Value     |
|---------------------------------|-----------|
| Central wavelength(nm)          | 980,850   |
| Bandwidth(nm)                   | ±10       |
| Insertion loss@23 °C            | ≤1.3      |
| Isolation 23 °C (dB)            | ≥25       |
| Polarization dependent loss(dB) | ≤0.15     |
| Return loss(Input/output) (dB)  | ≥50/50    |
| Power(W)                        | 0.3-5     |
| Fiber type                      | HI780     |
| Operating temperature( °C )     | 0 ~ +65   |
| Storage temperature( °C )       | -20 ~ +85 |
| Package dimensions(mm)          | 62x32x28  |

When using the Connector, the processing power is only 1W, the Insertion loss is 0.3dB higher, the return loss is 5dB lower, and the extinction ratio is 2dB lower. The Connector key is aligned with the slow axis.

## Package dimensions

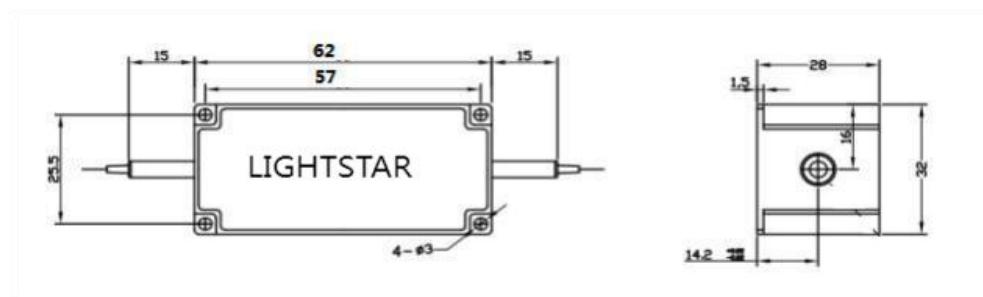

## Ordering information

PIIS-①①①①-②②-③③③-④-⑤-⑥

①①①①:Wavelength  
0850=850nm  
0980=980nm  
SSSS=Specify

②②:Power  
00=300mW  
01=1W  
SS=Specify

③③③:Fiber type  
006=HI780  
SSS=Specify

④:Pigtail type  
1=250um bare fiber  
2=900um loose tube  
S=Specify

⑤:Length  
H=0.5m  
1= 1.0m  
S=Specify

⑥:Connector  
0=None  
1=FC/UPC  
2=FC/APC  
S=Specify