

1310-2050nm Polarization-maintaining Circulator(500W)

Features

- Low insertion loss
- High extinction ratio
- Excellent environmental stability

Application


- Erbium doped fiber amplifiers&Raman fiber amplifiers
- Optical instrument&Both way Pump system
- Fiber optic sensor&Dispersion compensation device

Specifications

Parameter	Unit	Value											
Type		Type A		Type B		Type A		Type B					
Port type		3 Port	4 Port	3 Port	4 Port	3 Port	4 Port	3 Port	4 Port				
Central wavelength	nm	2050,2000,1950				1550,1480,1310							
Operating wavelength range	nm					±20							
Typical insertion loss@23 °C	dB	1.4	1.6	1.3	1.5	0.7	1.1	0.6	1.0				
Maximum insertion loss@23 °C	dB	1.4	1.6	1.3	1.5	0.9	1.3	0.8	1.2				
Typical peak isolation @23°C	dB	18		28		46		30					
Minimum isolation @23°C	dB	16		26		40		20					
Minimum extinction ratio@23 °C	dB	18				20							
Minimum crosstalk	dB					50							
Minimum return loss	dB					50							
Working axis		Slow axis operation, Fast axle cutoff											
Maximum optical power (CW)	mW					500							
Maximum tensile load	N					5							
Fiber type		PM Panda fiber											
Package dimensions	mm					5.5x35							
Operating temperature	°C					-5~+70							
Storage temperature	°C					-40~+85							

When using the Connector, the processing power is only 1W, the Insertion loss is 0.3dB higher, the return loss is 5dB lower, and the extinction ratio is 2dB lower. The Connector key is aligned with the slow axis.

Package dimensions

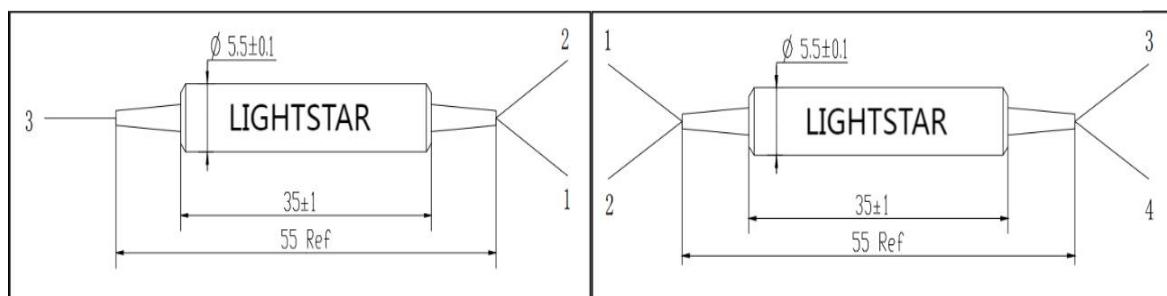

Ordering information

PMCIR-①①①①-②-③-④④④-⑤-⑥-⑦-⑧-⑨

①①①① :Wavelength 1550=1550nm	②:Port type 1=1*2	③:Rank A=Type A	④④④:Fiber type 001=PM1550	⑤:Working axis F=Slow axis operation, Fast axle cutoff
2000=2000nm SSSS=Specify	2=2*2	B=Type B SSS=Specify	002=PM1310 SSS=Specify	
⑥:Package dimensions 0= φ5.5x35mm S=Specify	⑦:Length H=0.5m 1= 1.0m S=Specify	⑧:Pigtail type 1=250um bare fiber 2=900um loose tube S=Specify	⑨:Connector 0=None 1=FC/UPC 2=FC/APC S=Specify	