



1310-2050nm Polarization-maintaining Isolator(500mW)

Features

- Low insertion loss
- High return loss
- High extinction ratio
- High isolation
- High stability & Reliability

Application


- Fiber laser&Optical fiber amplifier
- Test instrument&Communication system
- Optical fiber sensing
- Product research

Specifications

Parameter	Unit	Value			
		Single stage	Double stage	Single stage	Double stage
Rank					
Central wavelength	nm	2050,2000, 1950		1550,1480,1310	
Operating wavelength range	nm		±20		
Typical peak Isolation @23°C	dB	20	30	42	58
Minimum isolation @23°C	dB	18	28	28	45
Typical insertion loss@23°C	dB	0.8	1.0	0.4	0.5
Maximum insertion loss@23°C	dB	1.2	1.3	0.55	0.65
Minimum extinction ratio@23°C	Biaxial operation	dB	18		20
	Fast axle cutoff	dB	20		25
Minimum return loss(input/output)	dB		50/50		
Maximum optical power (CW)	mW		500		
Fiber type			PM Panda fiber		
Maximum tensile load	N		5		
Operating temperature	°C		0~+70		
Storage temperature	°C		-40~+85		

When using the Connector, the processing power is only 1W, the Insertion loss is 0.3dB higher, the return loss is 5dB lower, and the extinction ratio is 2dB lower. The Connector key is aligned with the slow axis.

Package dimensions

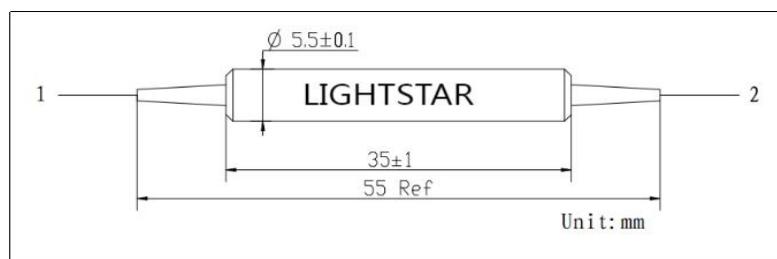

Ordering information

PMIS-①①①①-②-③-④④④-⑤-⑥-⑦-⑧

- | | | | |
|---|---|---|--|
| ①①①①:Wavelength
1310=1310nm
1550=1550nm
SSSS=Specify | ②Core type
S=Single stage core
D=Double stage core | ③:Working axis
B=Biaxial operation
F=Fast axle cutoff | ④④④:Fiber type
001=PM1550
002=PM1310
SSS=Specify |
| ⑤:Package dimensions
0= φ5.5x35mm
S=Specify | ⑥:Pigtail type
1=250um bare fiber
2=900um loose tube
S=Specify | ⑦:Length
H=0.5m
1= 1.0m
S=Specify | ⑧:Connector
0=None
1=FC/UPC
2=FC/APC
S=Specify |